


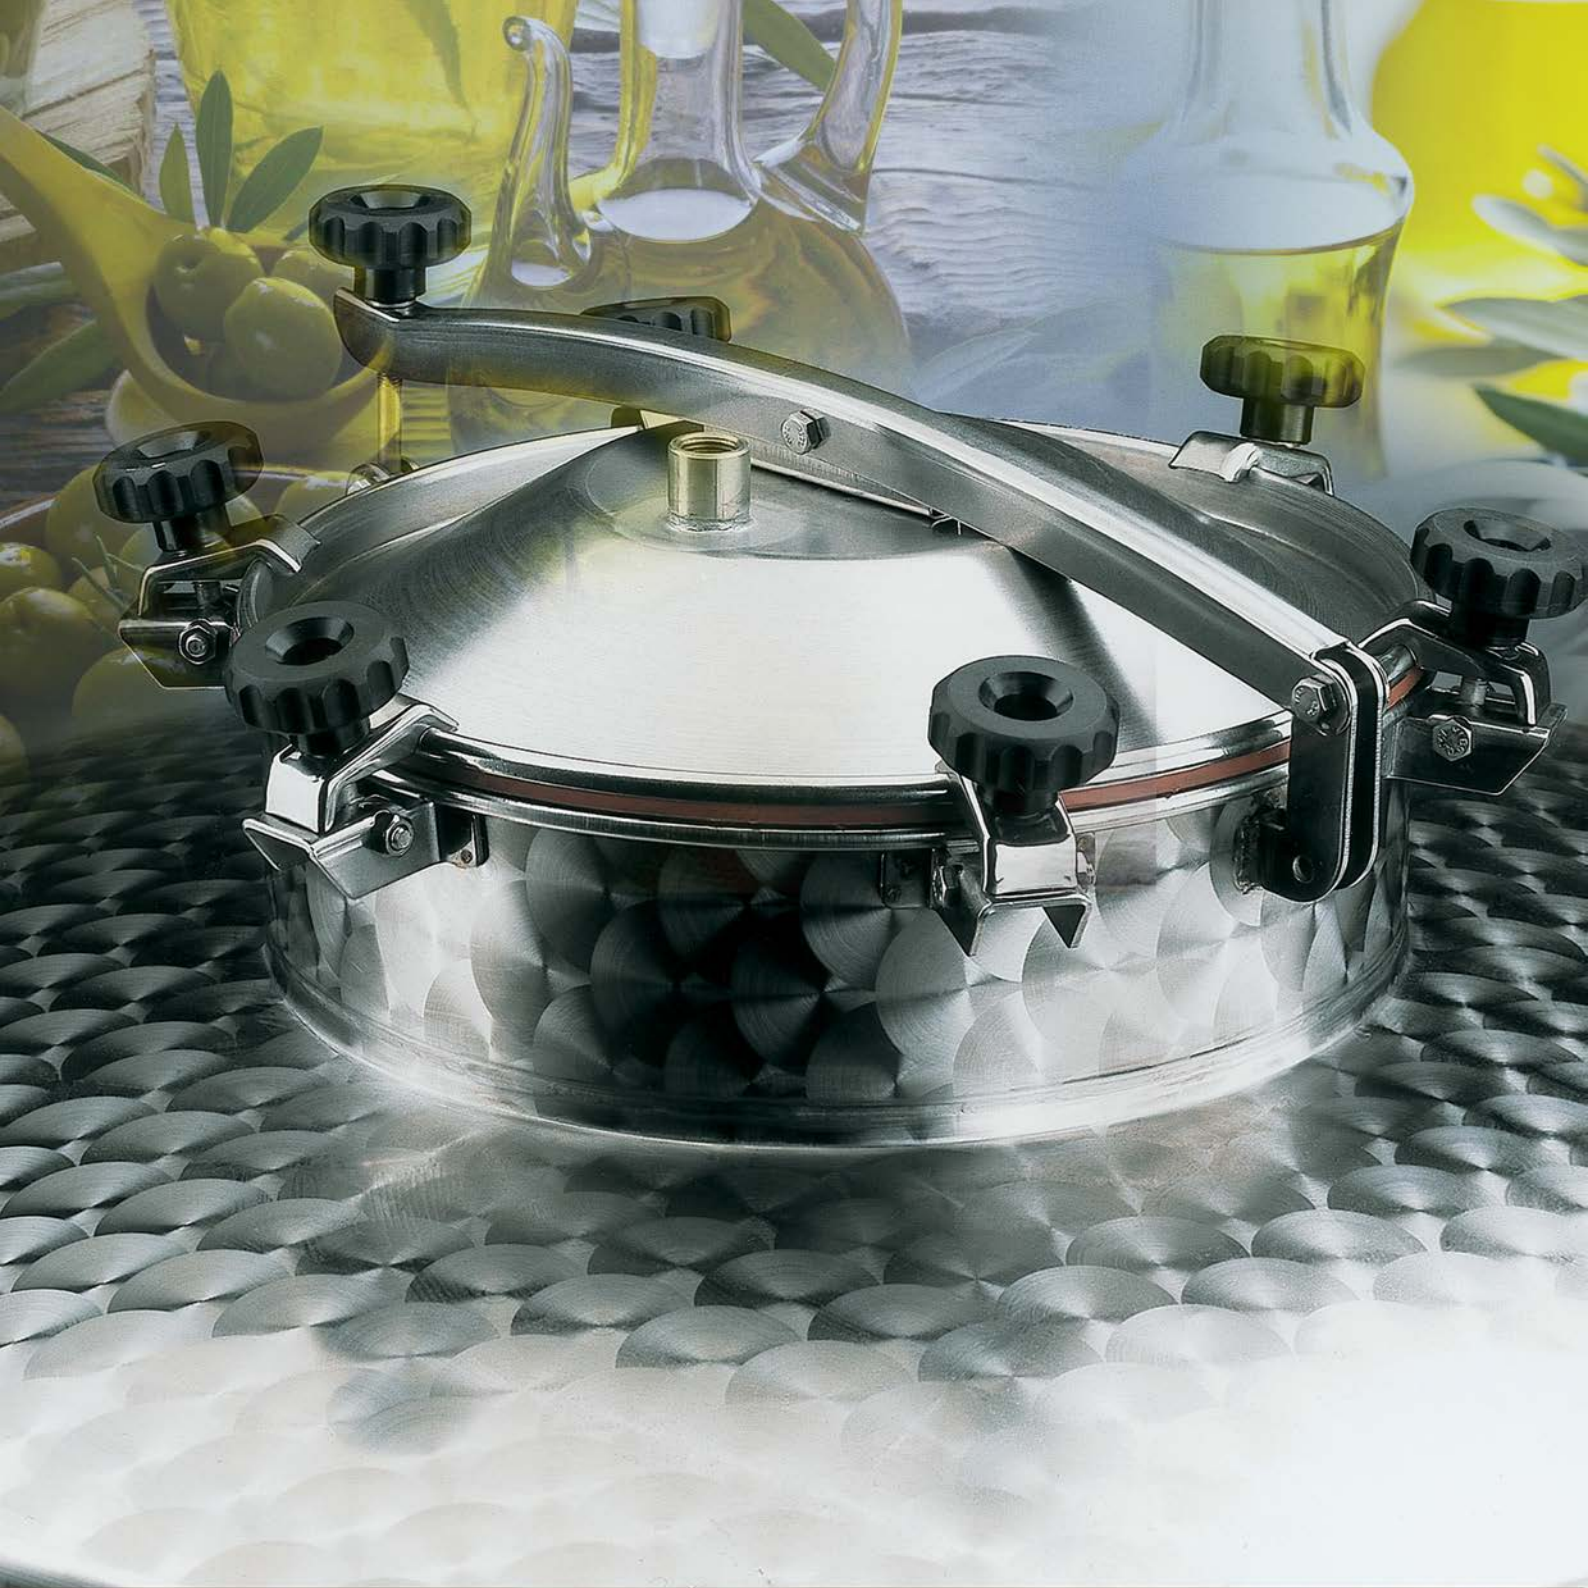

Ghidi

WE DESIGN AND PRODUCE

Stainless steel tanks

Stainless steel tanks for **oil** AISI 304

Small Capacities

01	Mod. FPP for oil	3
02	Mod. DOMED Mono-Block Bottom	4
03	Mod. FPP for transport	5
04	Mod. FCG for oil	6
05	Mod. FCGS for storage	7
06	Mod. FPS for storage	8
07	Cisterne	9
08	Danubio	10



Big Capacities

01	Mod. FCGS for storage	11
02	Mod. FPS for storage	12
03	Mod. ISO Insulated	13



01. Tank Mod. FPP

CODE	LITERS	Ø	H
10025	25*	365	250
10050	50*	365	500
10075	75*	365	750
10100	100*	410	750
10150	150*	510	750
10200	200*	510	1000
10300	300*	620	1000
10400	400	720	1000
10500	500	720	1250
10600	600	720	1500
10800	800	920	1250
11000	1000	920	1500
11500	1500	1160	1500
12000	2000	1310	1500

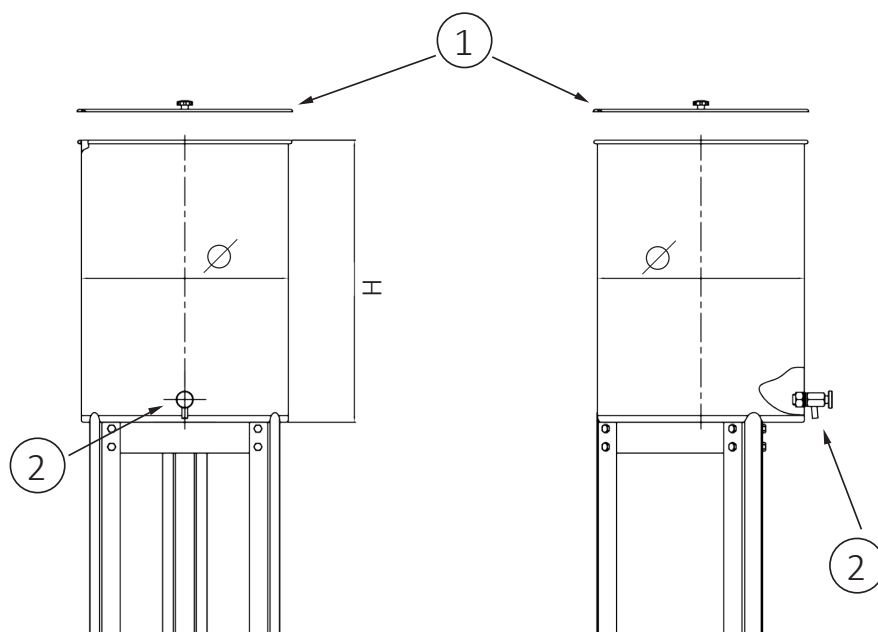

STANDARD EQUIPMENT



1. Antidust Cover
2. Stainless steel 1/2" tap
*Stainless steel 1" valve


SPECIAL FITTINGS

- A. Stainless steel base

See special fittings pages

02. Tank Mod. DOMED Mono-Block Bottom

CODE	LITERS	Ø	H	HT
M10050	50	365	500	1000
M10075	75	365	750	1250
M10100	100	410	750	1250
M10150	150	510	750	1250
M10200	200	510	1000	1500
M10300	300	620	1000	1500

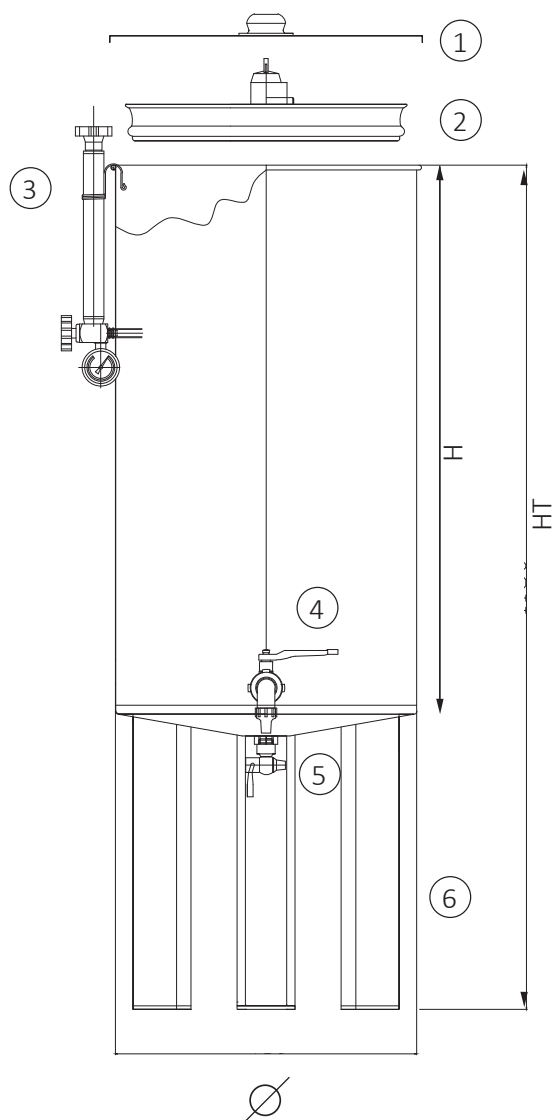


STANDARD EQUIPMENT



1. Antidust cover
2. Floating lid
3. Pump with maometer
4. Stainless steel 1" valve
5. Stainless steel 1/2" tap
6. Stainless steel base

03. Tank Mod. FPP for Transport

CODE	LITRES	Ø	H
30025	25	365	250
30050	50	365	500
30075	75	365	750
30100	100	410	750
30150	150	510	750
30200	200	510	1000

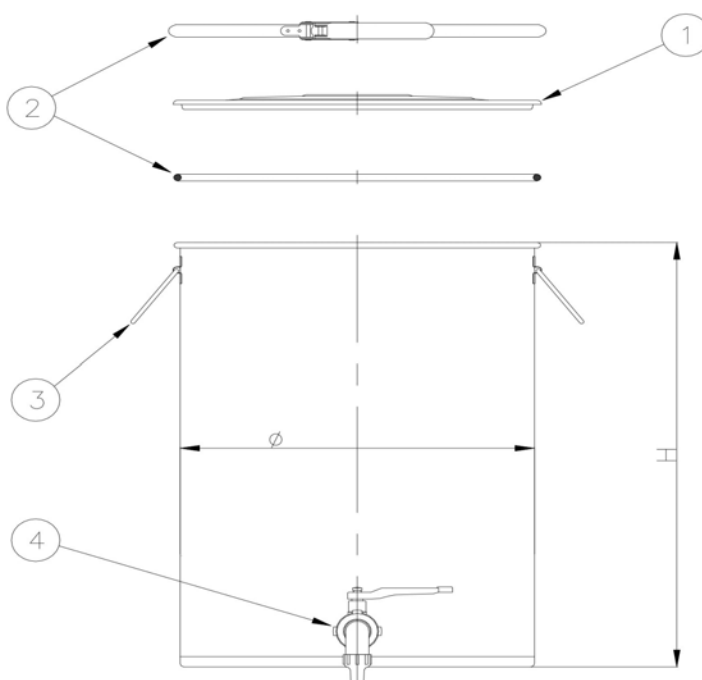

STANDARD EQUIPMENT




1. Cover
2. Clip & Joint
3. Handles
4. Stainless steel 1/2" tap

SPECIAL FITTINGS

- A. Stainless steel base

See special fittings pages

04. TANK MOD. FCG

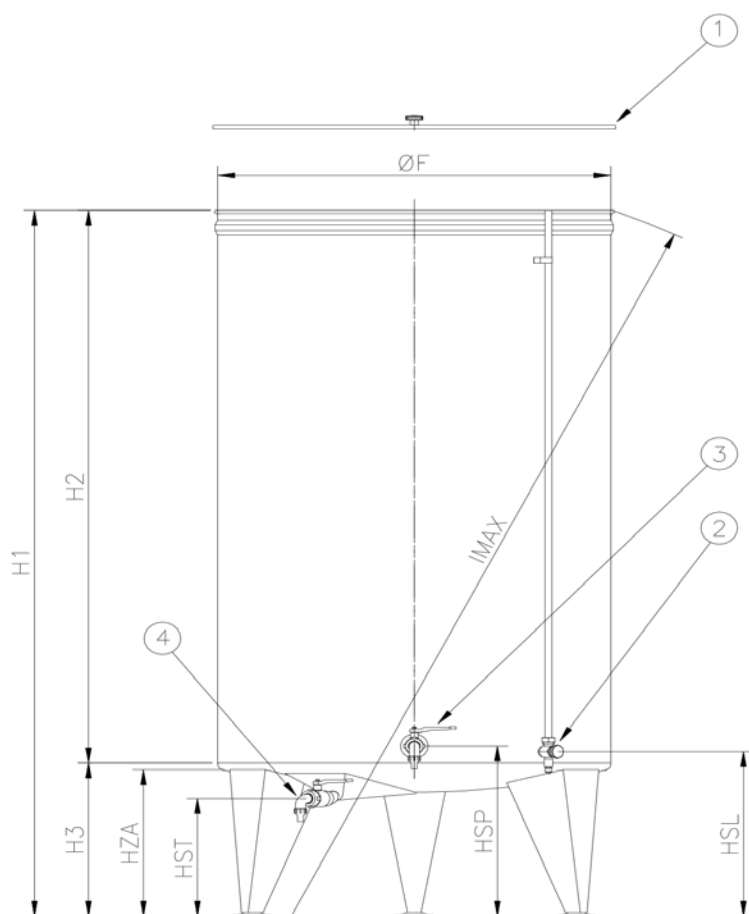

STANDARD EQUIPMENT




1. Antidust cover
2. Level gauge
3. Gate for clear removal 1" with Ghidi 1" in acciaio inox
4. Gate to complete whasing-pipe whit valve Ghidi 1" inox


SPECIAL FITTINGS

- A. Wine taster *Cod. 7090*
- B. Protection Sheet level. Gauge per meter *Cod. 7092*
- C. Every kind of valves
- D. Door Ø 300 mm
- E. H legs mm 600 - H legs mm 500 - Adjustable feet


See special fittings pages




A.



D.



B.





E.




C.

COD. S/PORT.	COD. C/PORT.	LITERS	ØF	H1	H2	H3	HSL	HSP	HST	LEGS	HZA	IMAX
70301	*****	300	620	1410	1000	410	440	455	315	3	390	1500
70401	70402	400	720	1410	1000	410	440	455	315	3	390	1525
70501	70502	500	720	1660	1250	410	440	455	315	3	390	1755
70601	70602	600	720	1910	1500	410	440	455	315	3	390	1995
70801	70802	800	920	1660	1250	410	440	455	315	3	390	1810
71001	71002	1000	920	1910	1500	410	440	455	315	3	390	2045
71501	71502	1500	1160	1905	1500	405	435	435	215	3	400	2050
72001	72002	2000	1310	1910	1500	410	440	440	220	3	400	2045

05. TANK MOD. FCGS FOR STORAGE

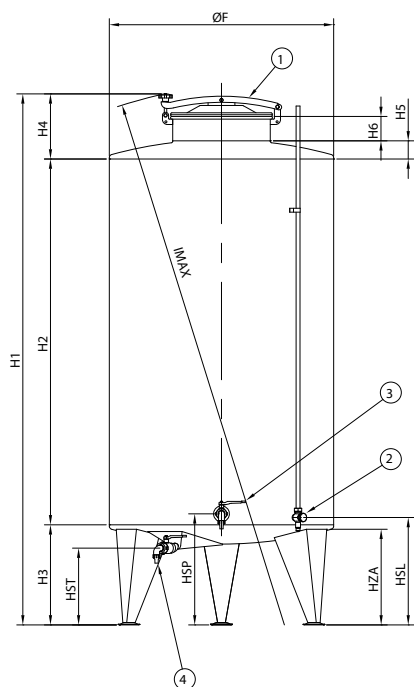

A.



B.



C.



STANDARD EQUIPMENT




1. Cover with bolt Ø 400 mm
2. Level gauge
3. Gate for clear removal with Valve 1" Ghidi inox
4. Gate for complete wasting-pipe with Valve 1" Ghidi inox




SPECIAL FITTINGS

- A. Wine taster *Code 7090*
 - B. Protection Sheet level. Gauge per meter *Code 7092*
 - C. Every kind of valves
 - D. Door circ. Ø 300 mm
 - E. H legs mm 600 - H legs mm 500 - Adjustable feet
 - F. Over with 4 holdfast and level gauge with re-entry for nitrogen
- Code AC0021*


See special fittings pages



D.





E.




F.

CODE	CODE W/DOOR	LITERS	ØF	H1	H2	H3	H4	HSP	HST	LEGS	HZA	IMAX
60300	*****	300	620	1670	1000	410	260	455	315	3	390	1670
60400	60407	400	720	1675	1000	410	265	455	315	3	390	1675
60500	60507	500	720	1925	1250	410	265	455	315	3	390	1925
60600	60607	600	720	2175	1500	410	265	455	315	3	390	2170
60800	60807	800	920	1930	1250	410	270	455	315	3	390	1990
61000	61007	1000	920	2180	1500	410	270	455	315	3	390	2235
61500	61507	1500	1160	2210	1500	405	305	435	215	3	400	2235
62000	62007	2000	1310	2215	1500	410	305	440	220	3	400	2245

06. TANK MOD. FPS FOR STORAGE

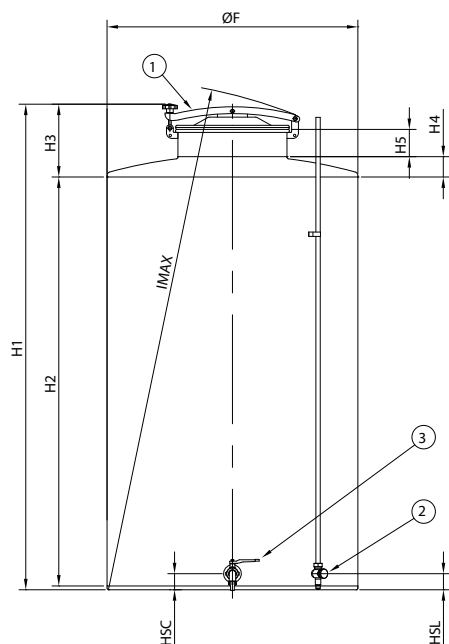

A.



B.



C.



STANDARD EQUIPMENT




1. Door with bolt 400 mm
2. Level gauge
3. Gate for complete wasting-pipe with Valve 1" Ghidi inox


SPECIAL FITTINGS

- A. Wine taster *Code 7090*
- B. Protection Sheet level. Gauge per meter *Code 7092*
- C. Every kind of valves
- D. Door circ. Ø 300 mm
- E. Cover with 4 holdfast and level gauge with re-entry for nitrogen *Code AC0021*
- F. Stainless steel base

See special fittings pages




D.



E.

CODE	CODE W/DOOR	LITERS	ØF	H1	H2	H3	H4	H5	H6	HSL	HSC	IMAX
50300	*****	300	620	1275	1000	15	260	65	100	50	60	1345
50400	50407	400	720	1280	1000	15	265	70	100	50	60	1370
50500	50507	500	720	1530	1250	15	265	70	100	50	60	1600
50600	50607	600	720	1780	1500	15	265	70	100	50	60	1835
50800	50807	800	920	1535	1250	15	270	75	100	50	60	1645
51000	51007	1000	920	1785	1500	15	270	75	100	50	60	1875
51500	51507	1500	1160	1825	1500	20	305	115	100	60	60	1960
52000	52007	2000	1310	1825	1500	20	305	115	100	60	60	1990

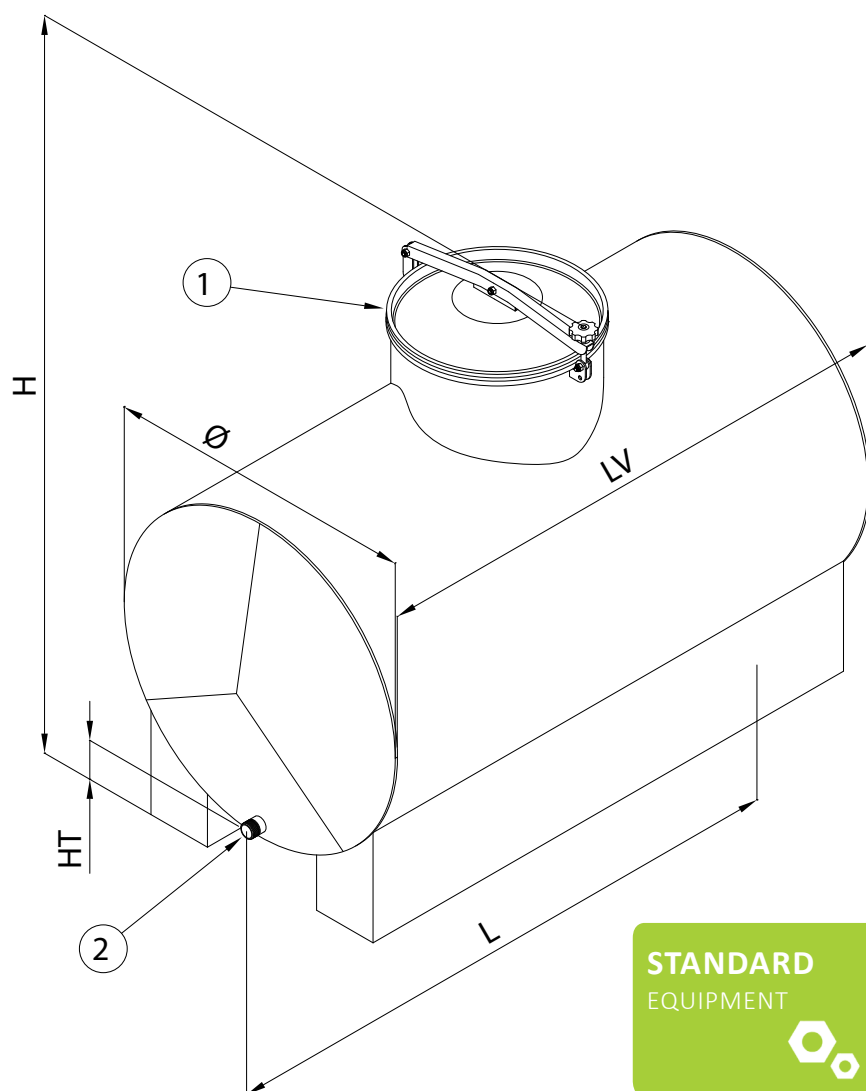

STANDARD EQUIPMENT



1. Cover with ball Ø 400 mm
2. Gate for complete wasting-pipt (to specify Ø)


07. TANK MOD. CISTERN

CODE	LITERS	Ø	H	HT	L	LV
150300	300	620	975	100	1135	1000
150400	400	720	1075	100	1135	1000
150500	500	720	1075	100	1385	1250
150600	600	720	1075	100	1635	1500
150800	800	920	1275	100	1385	1250
151000	1000	920	1275	100	1635	1500
151500	1500	1160	1515	100	1635	1500
152000	2000	1310	1550	100	1635	1500


SPECIAL FITTINGS

A. Every kind of valves

[See special fittings pages](#)



08. TANK MOD. DANUBIO

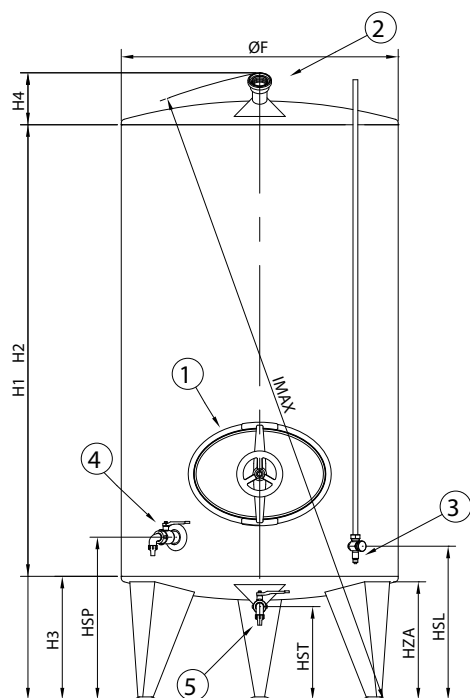

STANDARD EQUIPMENT




1. Oval door 300X435
2. Thread connector female DIN 11851/405 DN50
3. Level gauge
4. Gate for clear removal with Valve 1" Ghidi inox
5. Gate for complete wasting-pipe with Valve 1" Ghidi inox


SPECIAL FITTINGS

- A. Wine taster *Code 7090*
- B. Protection Sheet level. Gauge per meter *Code 7092*
- C. Every kind of valves

See special fittings pages



A.



B.




C.



CODE	LITERS	ØF	H1	H2	H3	H4	HSL	HSP	HST	HZA	HP	IMAX
60801	800	920	1835	1250	410	175	510	540	315	390	170	1840
61001	1000	920	2085	1500	410	175	510	540	315	390	170	2090
61501	1500	1160	2085	1500	405	175	510	540	315	400	170	2100
62001	2000	1310	2085	1500	405	175	510	540	315	400	170	2110
62501	2500	1310	2565	1875	515	175	510	540	415	510	170	2635
63001	3000	1310	2940	2250	515	175	510	540	415	510	170	3010

01. TANK MOD. FCGS FOR STORAGE

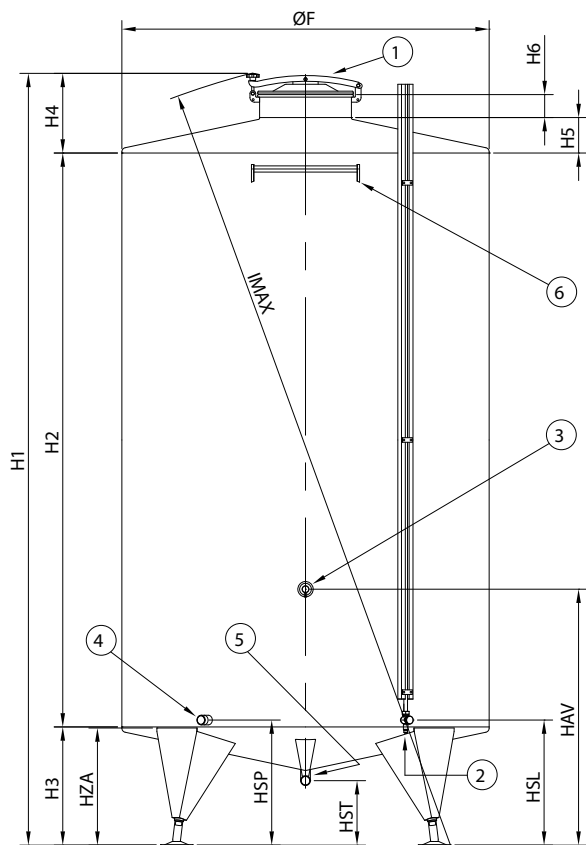

STANDARD EQUIPMENT




1. Cover with bolt Ø 400 mm
2. Level gauge with protection sheet
3. Wine taster
4. Gate for clear removal (to specify Ø)
5. Gate for complete wasting-pipe
6. Ladder support

SPECIAL FITTINGS


- A. Round door Ø 400 mm *Code AP0003*
- B. Oval door 304x400 mm *Code AP0004*
- C. Rectangular door 420x310 mm *Code AP0005*
- D. Rectangular door 530x400 mm *Code AP0006*
- E. Moulded oval door 300x435 only for diameter 1310 *Code AP0007*
- F. Rectangular horizontal door. 310x420 *Code AP0008*
- G. Rectangular horizontal door 400x530 *Code AP0009*
- H. Cover with 4 holdfast and level gauge with re-entry for nitrogen *Code AC0021*
- I. Sprinkler for pipe filling up must Ø 40 *Code AZ1004* - Ø 50 *Code AZ1005* - Ø 60 *Code AZ1006*
- J. Moulded refrigerating band
- K. Thermometer *Code AZ0041*
- L. Every kind of valves
- M. Electric boiler

See special fittings pages

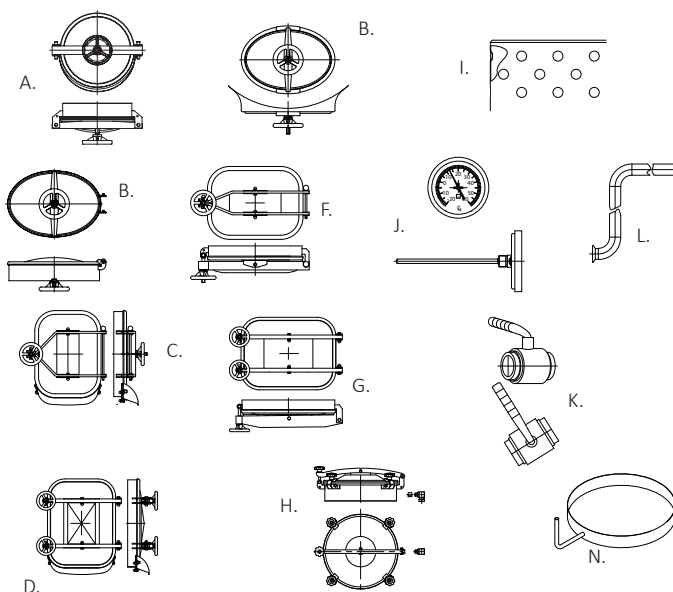

CODE	LITERS	ØF	H1	H2	H3	H4	H5	H6	HSL	HAV	HSP	HST	LEGS	HZA	IMAX
FCGS2500A	2500	1310	2695	1875	515	305	115	100	615	1215	545	325	3 reg.	510	2735
FCGS3000A	3000	1310	3070	2250	515	305	115	100	615	1215	545	325	3 reg.	510	3110
FCGS3000B	3000	1600	2360	1500	515	345	155	100	615	1215	545	280	4 reg.	510	2520
FCGS4000A	4000	1600	2860	2000	515	345	155	100	615	1215	545	280	4 reg.	510	2995
FCGS5000A	5000	1600	3360	2500	515	345	155	100	615	1215	545	280	4 reg.	510	3475
FCGS5000B	5000	1800	2860	2000	515	345	155	100	615	1215	545	280	4 reg.	510	3005
FCGS6000A	6000	1600	3860	3000	515	345	155	100	615	1215	545	280	4 reg.	510	3960
FCGS6500A	6500	1800	3360	2500	515	345	155	100	615	1215	545	280	4 reg.	510	3485
FCGS8000A	8000	1800	3860	3000	515	345	155	100	615	1215	545	280	4 reg.	510	3970
FCGS8000B	8000	2100	3395	2500	530	365	165	100	630	1230	560	275	4 reg.	525	3550
FCGS10000A	10000	2100	3895	3000	530	365	165	100	630	1230	560	275	4 reg.	525	4030
FCGS13500A	13500	2400	3920	3000	530	390	195	100	630	1230	560	255	5 reg.	525	4185


02. TANK MOD. FPS FOR STORAGE

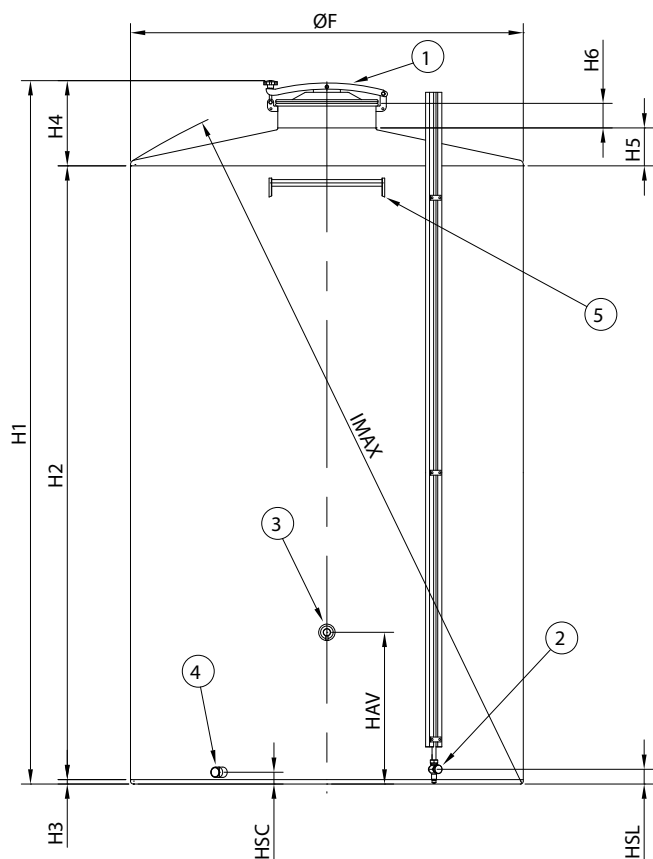

STANDARD EQUIPMENT



1. Cover with bolt $\varnothing$ 400 mm
2. Level gauge with protection sheet
3. Wine taster
4. Gate for clear removal (to specify $\varnothing$)
5. Ladder support (to specify $\varnothing$)

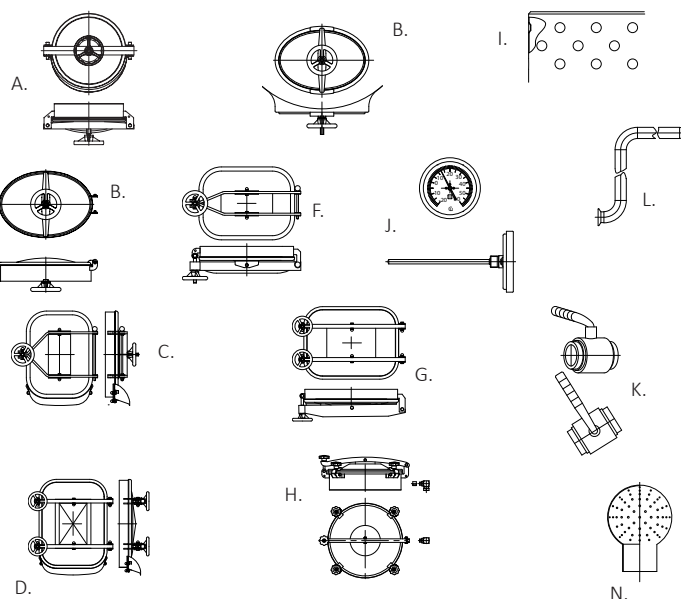


SPECIAL FITTINGS


- A. Round door $\varnothing$ 400 mm *Code AP0003*
- B. Oval door 304x400 mm *Code AP0004*
- C. Rectangular door 420x310 mm *Code AP0005*
- D. Rectangular door 530x400 mm *Code AP0006*
- E. Moulded oval door 300x435 only for diameter 1310 *Code AP0007*
- F. Rectangular horizontal door. 310x420 *Code AP0008*
- G. Rectangular horizontal door 400x530 *Code AP0009*
- H. Cover with 4 holdfast and level gauge with re-entry for nitrogen *Code AC0021*
- I. Sprinkler for pipe filling up must $\varnothing$ 40 *Code AZ1004* - $\varnothing$ 50 *Code AZ1005* - $\varnothing$ 60 *Code AZ1006*
- J. Moulded refrigerating band
- K. Thermometer *Code AZ0041*
- L. Every kind of valves
- M. Washing ball *Code AZ0071*

See special fittings pages

CODE	LITERS	ØF	H1	H2	H3	H4	H5	H6	HSL	HAV	HSC	IMAX
FPS2500A	2500	1310	2200	1875	20	305	115	100	100	720	50	2335
FPS3000A	3000	1310	2575	2250	20	305	115	100	100	720	50	2685
FPS3000B	3000	1600	1865	1500	20	345	155	100	100	720	50	2210
FPS4000A	4000	1600	2365	2000	20	345	155	100	100	720	50	2580
FPS5000A	5000	1600	2865	2500	20	345	155	100	100	720	50	3005
FPS5000B	5000	1800	2365	2000	20	345	155	100	100	720	50	2715
FPS6000A	6000	1600	3365	3000	20	345	155	100	100	720	50	3480
FPS6500A	6500	1800	2865	2500	20	345	155	100	100	720	50	3105
FPS8000A	8000	1800	3365	3000	20	345	155	100	100	720	50	3525
FPS8000B	8000	2100	2885	2500	20	365	165	100	100	720	50	3165
FPS10000A	10000	2100	3385	3000	20	365	165	100	100	720	50	3580
FPS13500A	13500	2400	3410	3000	20	390	195	100	100	720	50	3860

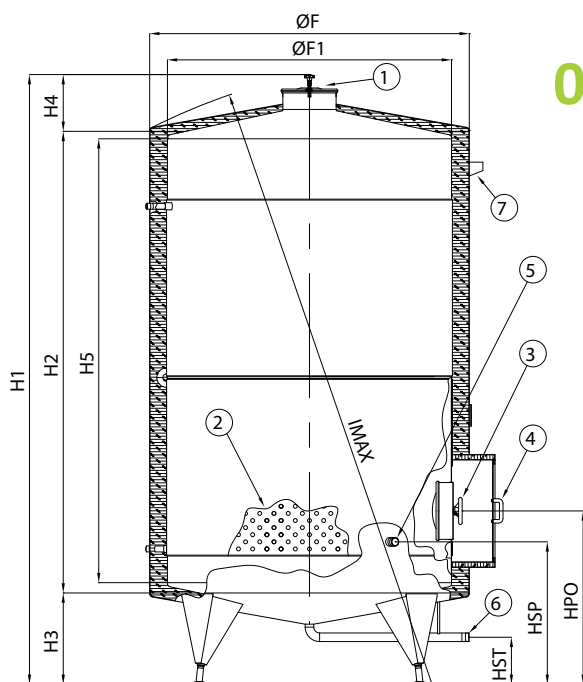

03. INSULATED TANK

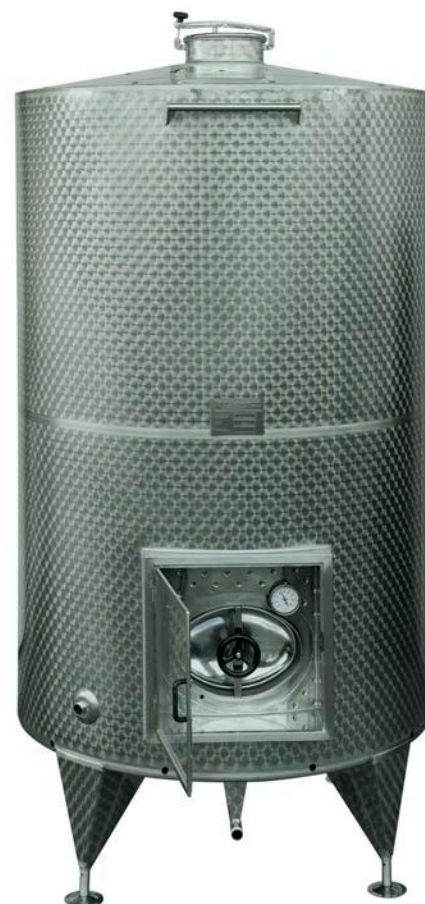

STANDARD EQUIPMENT



1. Cover with bolt Ø 300 mm
2. Moulded refrigerating band
3. Oval door 304x400
4. Oval door insulation
5. Gate for clear removal (to specify Ø)
6. Gate for complete wasting-pipe (to specify Ø)
7. Ladder support

SPECIAL FITTINGS





A. Washing ball *Code AZ0071*

B. Flanged decanting valve

C. Every kind of valves

D. Thermometer *Code AZ0041*

See special fittings pages



CODE	LITERS	ØF	H1	H2	H3	H4	ØF1	H5	HPO	HSP	HST	LEGS	IMAX
ISO1000A	1000	1160	2305	1500	515	290	920	1400	975	805	330	3 reg.	2340
ISO1500A	1500	1310	2320	1500	515	305	1160	1400	975	805	325	3 reg.	2350
ISO2000A	2000	1500	2360	1500	515	345	1310	1400	975	805	280	3 reg.	2645
ISO2500A	2500	1500	2735	1875	515	345	1310	1775	975	805	280	4 reg.	2990
ISO3000A	3000	1500	3115	2250	515	345	1310	2150	975	805	280	4 reg.	3130
ISO3000B	3000	1800	2360	1500	515	345	1600	1400	975	805	280	4 reg.	2680
ISO4000A	4000	1800	2860	2000	515	345	1600	1900	975	805	280	4 reg.	3010
ISO5000A	5000	1800	3360	2500	515	345	1600	2400	975	805	280	4 reg.	3450
ISO5000B	5000	2100	2895	2000	530	365	1800	1900	990	820	275	4 reg.	3120
ISO6000A	6000	1800	3860	3000	515	345	1600	2900	975	805	280	4 reg.	3900
ISO6500A	6500	2100	3395	2500	530	365	1800	2400	990	820	275	4 reg.	3590
ISO8000A	8000	2100	3895	3000	530	365	1800	2900	990	820	275	4 reg.	4070
ISO8000B	8000	2300	3420	2500	530	390	2100	2400	990	820	255	5 reg.	3805
ISO10000A	10000	2300	3920	3000	530	390	2100	2900	990	820	255	5 reg.	4220